

9" Under Deck Split Ring Installation Instructions

1. Drill $3/8$ " dia. holes (8) thru the deck using template.
2. Cut $4-1/2$ " dia. hole thru the deck using template.
3. Place both rings under the deck by feeding thru the $4-1/2$ " dia. hole. Over lap the parts so they form a ring (see diagram A).
4. Make sure that the flat surfaces is up against the under side of the deck and position ring into place so that the 2 deck attachment screws ($5/16-18$ counter sunk head) may be installed thru the deck and thru the non threaded ear into the threaded ear (see diagram B). This will hold the ring in place.
5. Position base mounting holes (6) over drilled holes in deck.
6. Install mounting screws ($5/16-18$ counter sunk) thru base and deck and thread into deck ring.

Note: hardware not included.

DIAGRAM A

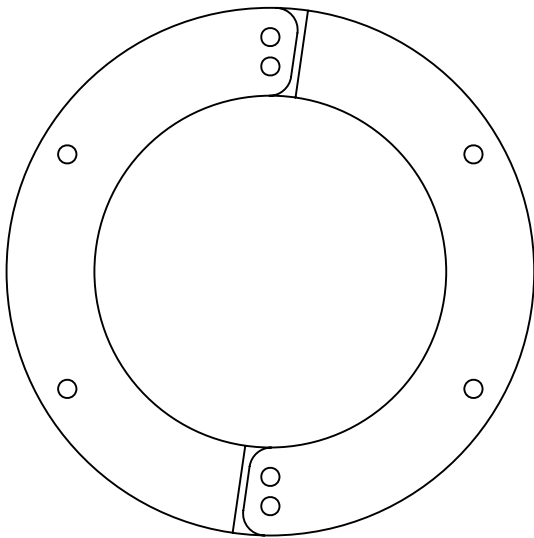


DIAGRAM B

